


PVC TARPAULIN FOR VENTILATION DUCT 1000D*1000D 12*12 510GSM

Features

- A variety of color choices are available
- Excellent tensile strength, tear resistance, extremely soft hand feeling
- Waterproof, flame retardant, Anti-UV, Anti-Bacterial, Anti-Mildew, Oil resistant
- Strong and durable, not easy to wear

Product Overview

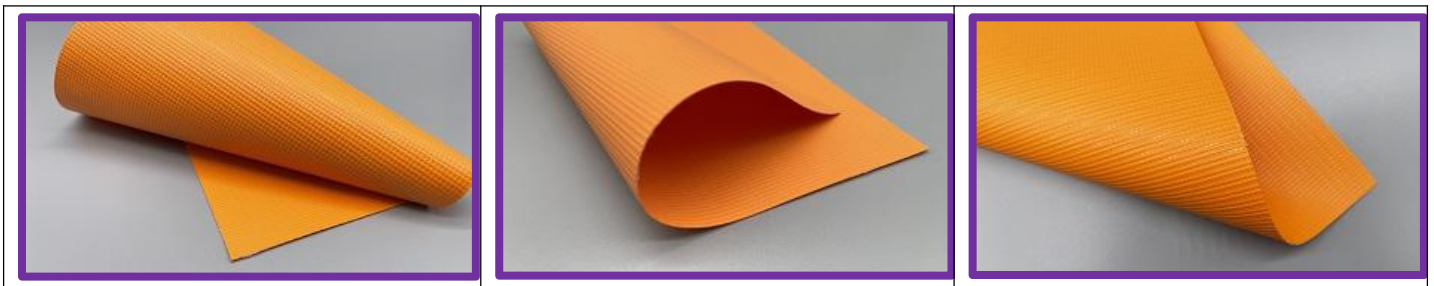

Technical Data Sheet

Item Code		PTVDGY1012510	Test Method
Base Fabric		1000D*1000D 12*12	DIN EN ISO2060
Weight (GSM)		510	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1300	DIN53354
	Weft (N/5cm)	1300	DIN53354
Tear Strength	Warp (N/5cm)	250	DIN53363
	Weft (N/5cm)	220	DIN53363
Peeling Strength	Warp (N/5cm)	100	DIN53357
	Weft (N/5cm)	100	DIN53357
Temperature		-30°C/+70°C	
Flame Retardant (Optional)		B1/M1/M2/NFPA701	
Lacquering (Optional)		Acrylic/ PVDF	
Special Treatment (Optional)		Anti-Wicking/Anti-UV/Anti-Aging/Cold Resistant/Osmosis Prevention/Mildew Resistant	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

	<p>Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District, Haining, Zhejiang, China Tel: +86-573-80776996 Fax: +86-573-80776998 Mob/Skype/Wechat/WhatsApp: +86-15858322153 mailto:contact@hncomax.com https://www.hncomax.com</p>	
---	--	---